


SERIES DRCS
DRIVE FOR
STEPPER MOTORS



SERIES DRCS SMART DRIVE FOR STEPPER MOTORS

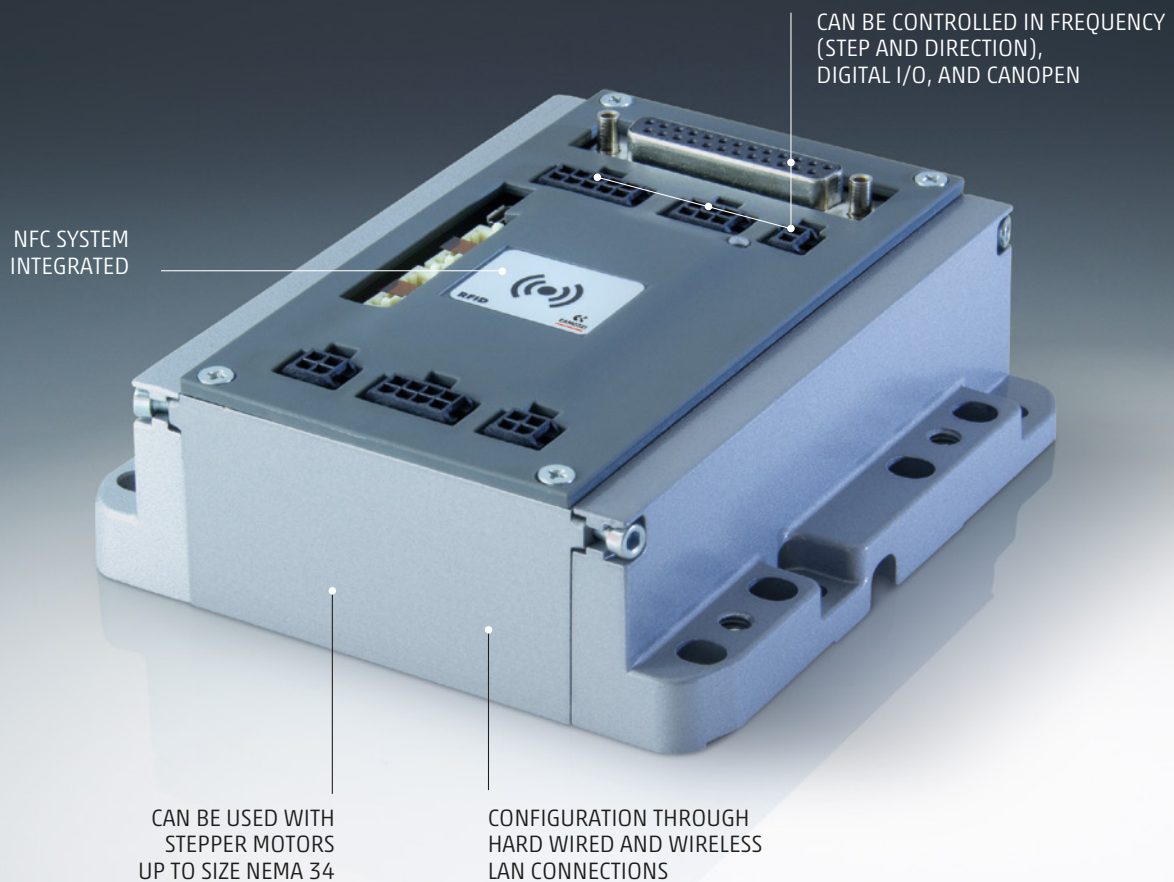

The Series DRCS drives, compact and optimised in one size, have been specially configured for all small and medium-sized Camozzi stepper motors. They are capable of controlling stepper motors with two-phase and micro-stepping feed. Further, they can calculate the normal resonance frequency of the motors and optimise their driving.

The use of micro-stepping control (up to 1/128 steps) enables the drive to almost replicate a sinusoidal current while considerably reducing the natural resonance of the motor itself. The availability of eight inputs allows the realisation of a table of 256 commands, for each of which it is possible to set position, speed, acceleration and deceleration.

Each command can be absolute or relative. Through the Step and Direction commands, it is possible to control the drive in frequency mode. The frequency defines the speed, while the number of steps defines the position. The Series DRCS drives are equipped with serial protocols CANopen CiA 301 and CiA 402 through which it is possible to perform motion control and condition monitoring of the drive.

To configure the drive, wired (USB 2.0) or wireless WLAN connections can be used. Thanks to an innovative system that takes advantage of Near Field Communication (NFC) technology, it is possible to extract production and statistical data on the use of the drive, which are essential parameters for industry 4.0.




BENEFITS




Full digital drive with integrated PLC functions



Programmable with the Camozzi QSet configuration software



Feedback by incremental encoder




NFC (Near Field Communication) system enabled



256 programmable positions (setting, acceleration, speed and position)





Wire configuration by means of USB 2.0 and wireless configuration by means of WLAN BL-BLE




Can be controlled in frequency (step and direction), digital I/O and serial CANopen protocol

CLOUD
Data ingestion
& Data mining

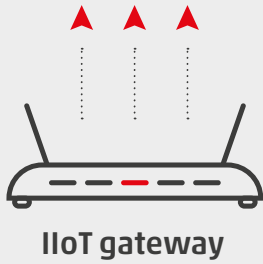

Data management Camozzi Digital

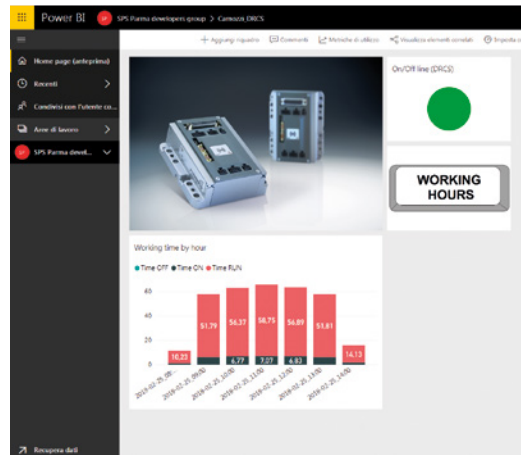

DIAGNOSTIC CHARACTERISTICS



ON/OFF time



Run time (working hours)



Health status



976 Cycle counter



Power consumption



Event (alarm) log

General data


| | |
|----------------------------------|--|
| SUPPLY VOLTAGE | |
| Logic | 18 ÷ 32 V DC |
| Power | 24 ÷ 60 V DC |
| CURRENT | |
| Current | 0.1 ÷ 7 A |
| Holding current | automatic reduction of the holding current with motor in stop mode, this function can be set according to the holding current or its delay |
| AMBIENT | |
| Operating temperature | 0 ÷ 40°C (up to 55°C with forced ventilation) |
| Storage temperature | -20°C ÷ 70°C |
| Humidity | 0 ÷ 90% |
| Altitude | < 1000 meters |
| Vibration | 1G (10 a 500 Hz) |
| Protection | overvoltage, minimum voltage, overtemperature, short-circuit or grounding on the motor |
| Control method | 4 state PWM 20kHz |
| Amplification type | dual H-Bridge, 4 Quadrants |
| Position control encoder | 100 a 5000 differential impulses / revolution |
| DIGITAL I/O | |
| Input control signal | 12 opto-isolated 24 V DC |
| Output control signal | 6 opto-isolated |
| Input impulse control | step inlet and frequency direction maximum 10kHz |
| Output control signal | electromechanical brake max current 1A |
| COMMUNICATION INTERFACE | |
| USB | USB 2.0 |
| WLAN | BL - BLE |
| RFID | with NFC devices |
| CANopen | CiA 301 e CiA 402 (interpolated position mode) |
| Microstep emulation | high resolution by means of microstepping and a detailed synchronization. Reduction of oscillations and of resonance vibrations |
| Anti-Resonance | activation of the oscillation system in order to reduce vibrations and obtain a smooth movement, control of speed and a reduction of the time of oscillation |
| Led status | green led: ready |
| Configuration | digital with the Camozzi QSet configuration software |
| Control methods | digital inputs frequency CANopen |
| MEMORY | |
| Data retention memory | flash |
| Configuration data backup memory | E ² prom |
| Weight | 0.46 kg |

Coding example

| | | | | | | | | | | |
|-------------|----------|------------|----------|----------|----------|----------|----------|----------|----------|----------|
| DRCS | - | A05 | - | 8 | - | D | - | 0 | - | A |
|-------------|----------|------------|----------|----------|----------|----------|----------|----------|----------|----------|

| | |
|-------------|---|
| DRCS | SERIES |
| A05 | SIZE AT MAX CURRENT: A05 = 7 A |
| 8 | SUPPLY: 8 = 48 V DC |
| D | COMMUNICATION: D = digital I/O and impulse frequency C = CANopen, Digital I/O and impulse frequency |
| 0 | FEEDBACK: 0 = feedback |
| A | VERSIONS: A = standard B = WLAN BL-BLE |

Series DRCS drives

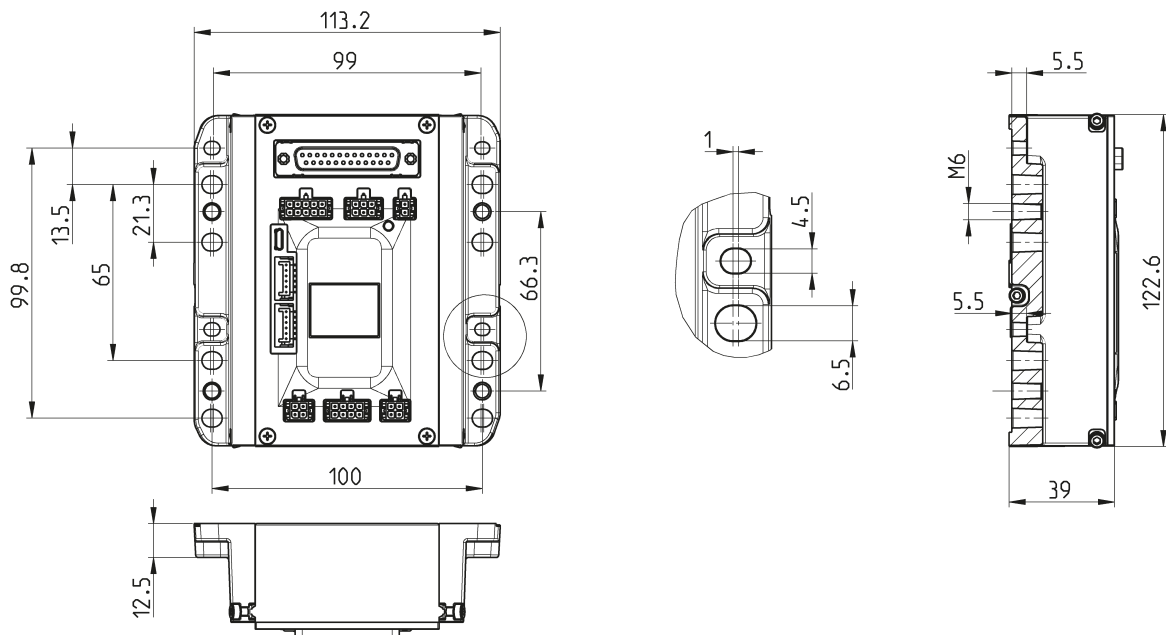

| Mod. | Max current | Logic supply | Power supply | Communication | Versions |
|------------------|-------------|--------------|--------------|--|-------------|
| DRCS-A05-8-D-0-A | 7 A | 24 V DC | 24 ÷ 48 V DC | Digital I/O and impulse frequency | standard |
| DRCS-A05-8-C-0-A | 7 A | 24 V DC | 24 ÷ 48 V DC | CANopen, Digital I/O and impulse frequency | standard |
| DRCS-A05-8-D-0-B | 7 A | 24 V DC | 24 ÷ 48 V DC | Digital I/O and impulse frequency | WLAN BL-BLE |
| DRCS-A05-8-C-0-B | 7 A | 24 V DC | 24 ÷ 48 V DC | CANopen, Digital I/O and impulse frequency | WLAN BL-BLE |

Cables and accessories

Cable for Series DRCS drive with brake

Mod.
EC-210A22-B300
EC-210A22-B500
EC-210A22-BA00



Cable for Series DRCS drive without brake

Mod.
EC-200A22-B300
EC-200A22-B500
EC-200A22-BA00



Motor cable for Series DRCS drive without brake (Nema 34 only)

Mod.
EC-200522-B300
EC-200522-B500
EC-200522-BA00



Encoder cable for Series DRCS drive

Mod.
EC-220A22-B300
EC-220A22-B500
EC-220A22-BA00



Cable for Series DRCS drive logic supply

Mod.
EC-140222-A220



Cable for Series DRCS drive power supply

Mod.
EC-230422-A200



Cable for Series DRCS drive CANopen

Mod.
EC-050522-A100
EC-050522-A300
EC-050522-A500



Cable for Series DRCS drive CANopen expansion

Mod.
EC-0130422-A030



CAN terminating resistor for Series DRCS drives

Mod.
EC-060623



Multipole I/O cable 25P M

Mod.
G2W-1
G2W-3



USB to Micro USB cable Mod. G11W-G12W-2

Mod.
G11W-G12W-2



Mounting brackets for DIN rail

Mod.
PCF-E520



Contacts

Camozzi Automation S.p.A.

Società Unipersonale
Via Eritrea, 20/I
25126 Brescia
Italy
Tel. +39 030 37921
info@camozzi.com

Customer Service

Tel. +39 030 3792790
service@camozzi.com

Export Department

Tel. +39 030 3792255
sales@camozzi.com

